


High Performance Double-Sided PET Tape

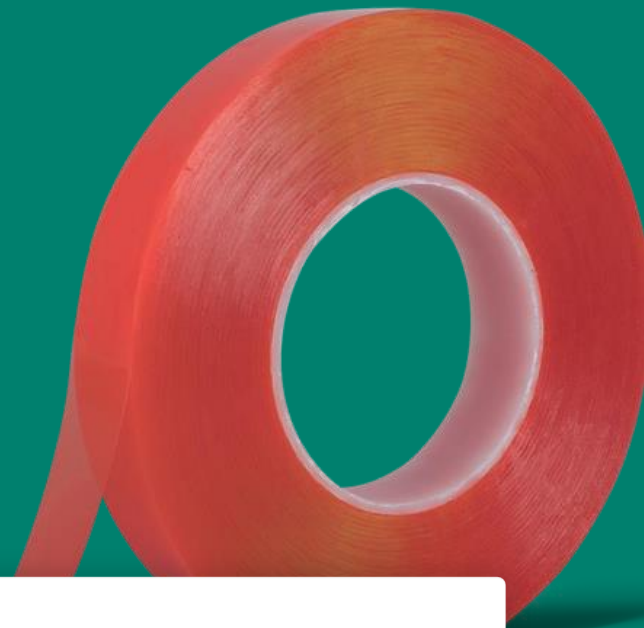

Technical Data Sheet

Carrier	Steel Adhesion Strength	Temperature Resistance	Release Liner	Thickness
PET	2.2kg / 25mm	Min -30°C (°F) Max 100 °C (212°F)	Red Film	0.2 mm/ 0.78 mil

Applications

Designed for bonding low surface energy materials, plastics, metals and glass.

Features

- Resistant to outdoor conditions and high temperature.
- Its solvent adhesive allows excellent adaptability to demanding conditions.

Recommendations

- The surfaces to be bonded must be clean, dry, and free of oil, silicone, or dust.
- When applying the tape, the surfaces to bond must be at a temperature between 18°C and 30°C (64°F to 86°F).
- It is necessary to apply pressure for 10 seconds on the bonded surfaces and wait 72 hours to achieve optimal adhesion before performing any tests.



Available Sizes

Size (mm x mts)	Size (In x Yd)
8 x 33	0.31 x 36
12 x 33	0.47 x 36
18 x 33	0.71 x 36
24 x 33	1.89 x 36